

EXACT 0201

Octene-1 Plastomer

DATA SHEET

Description and Attributes

EXACT™ 0201 is an ethylene based octene plastomer produced in a solution polymerisation process using a metallocene catalyst.

EXACT 0201 is a versatile blend partner for other polyolefins in film, extrusion and moulding applications, offering :

- Unrivalled sealing properties
- Outstanding toughness, puncture resistance and low temperature impact strength
- Excellent polyolefin compatibility
- Flexibility
- Excellent environmental stress cracking resistance
- Low amount of extractables
- High clarity

Applications

Demonstrated applications include :

- Seal layers in lamination and flexible barrier films
- High strength flexible films
- Heat shrinkable display film
- Specialty stretch film applications
- PP film toughness modification
- Roof coverings
- Tunnel linings
- Flexible low voltage insulation
- Halogen free flame retardant compounds
- Blow moulded articles
- Soft foams

General properties	Units	Typical values [1]	Method
Melt Flow Rate (2.16 kg/190°C)	dg/min	1.1	ISO 1133
Density (23°C)	kg/m ³	902	ISO 1183
Shore D hardness	-	43	ISO 868
DSC peak melting point	°C	97	ISO 11357
Vicat softening temperature (at 10 N)	°C	82	ISO 306
Brittleness temperature	°C	< -76	ASTM D746

Film properties [2]

Gloss		84	ASTM 2457 (45°)
Haze	%	2	ASTM D1003 (A)
Tensile modulus	MPa	65	ASTM D882
Seal initiation temperature	°C	87	ASTM F88
Puncture resistance energy	mJ/mm	2800	Internal method
Impact strength (blown film Monsanto dart)	g/μm	> 48	ASTM D1709-75


Moulded plaque properties [3]

Tensile strength at break	MPa	36	ISO 527-2 (5A)
Elongation at break	%	715	ISO 527-2 (5A)
Flexural modulus	MPa	72	ISO 178
Notched Izod at 23°C	kJ/m ²	No break	ISO 180 (1A)
Environmental stress crack resistance	hr	> 1000	ASTM D1693 (method B)

[1] Values are typical and not to be interpreted as specifications.

[2] Specifics of 40 μm blown film.

[3] Specifics of compression moulded test specimen.

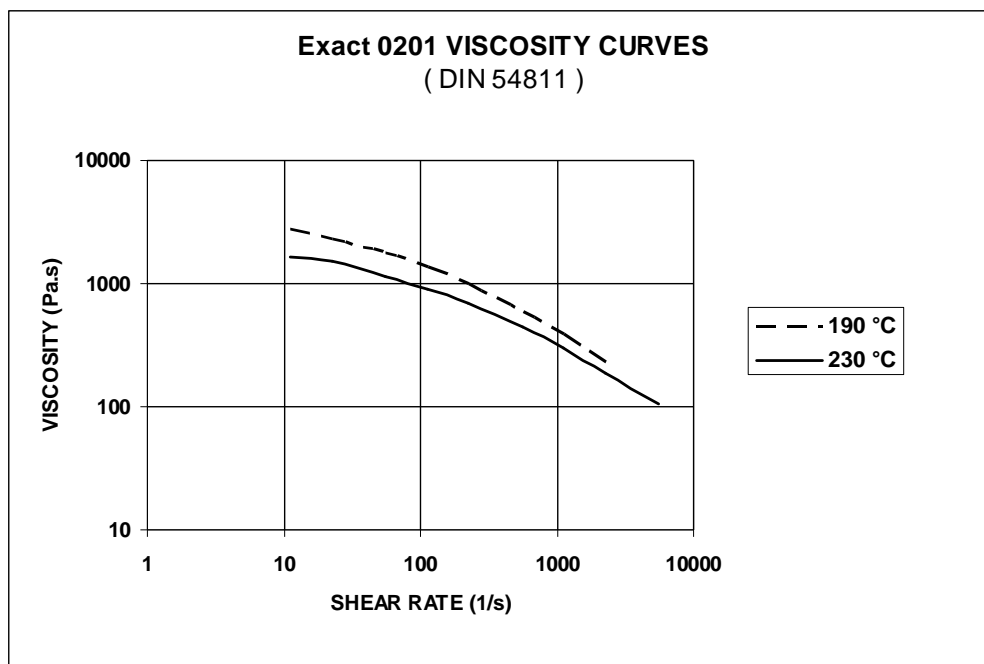

Additives

EXACT™ 0201 contains processing stabilizers.

Food Law Compliance and Product Handling

EXACT 0201 can - in principle - be used in food contact applications in various EU Member States and in the USA (FDA). Migration or use limitations may apply. Please contact your sales representative for more detailed information and/or actual compliance certification documents.

Specific information on material safety aspects of EXACT 0201 will be provided upon request.

Packaging

EXACT 0201 is supplied as free flowing pellets with standard package type 25 kg bags on shrink wrapped pallets with a total weight of 1,375 kg.

Further information

DEXPLASTOMERS v.o.f.
CBS-weg 2
P.O. Box 6500
6401 JH HEERLEN
The Netherlands

Tel. +31 45 5788002

www.dexplastomers.com

July 2011