

# EXACT 8230

## Octene-1 Plastomer

## DATA SHEET

### Description and Attributes

EXACT™ 8230 is an ethylene based octene plastomer produced in a solution polymerisation process using a metallocene catalyst.

Supplied in the form of free flowing pellets, EXACT 8230 is designed to offer:

- Outstanding flexibility, even at low temperatures
- Outstanding toughness
- High clarity
- High filler acceptance
- Excellent polyolefin compatibility

### Applications

Demonstrated applications include :

- Impact modification of PP
- Halogen free flame retardant compounds
- Automotive PP compounds
- Rotational moulding
- Extrusion coated structures

<b>General properties</b>	<b>Units</b>	<b>Typical values [1]</b>	<b>Method</b>
Melt Flow Rate (2.16 kg/190°C)	dg/min	30	ISO 1133
Density (23°C)	kg/m <sup>3</sup>	882	ISO 1183
Shore A hardness	--	83	ISO 868
Shore D hardness	--	<30	ISO 868
DSC peak melting point	°C	76	ISO 11357
Vicat softening temperature (at 10 N)	°C	43	ISO 306
Brittleness temperature	°C	< -76	ASTM D746

### Moulded plaque properties [2]


Tensile strength at break	MPa	7	ISO 527-2 (5A)
Elongation at break	%	980	ISO 527-2 (5A)
Flexural modulus	MPa	22	ISO 178
Notched Izod at 23°C	kJ/m <sup>2</sup>	No break	ISO 180 (1A)
Environmental stress crack resistance	hr	> 1000	ASTM D1693 (method B)

### Extrusion coating performance of blend with 40 weight % LDPE [3]

Neck-in at 100 m/min	cm	6.2	Internal method
Draw down	m/min	480	Internal method

[1] Values are typical and not to be interpreted as specifications.

[2] Specifics of compression moulded test specimen.

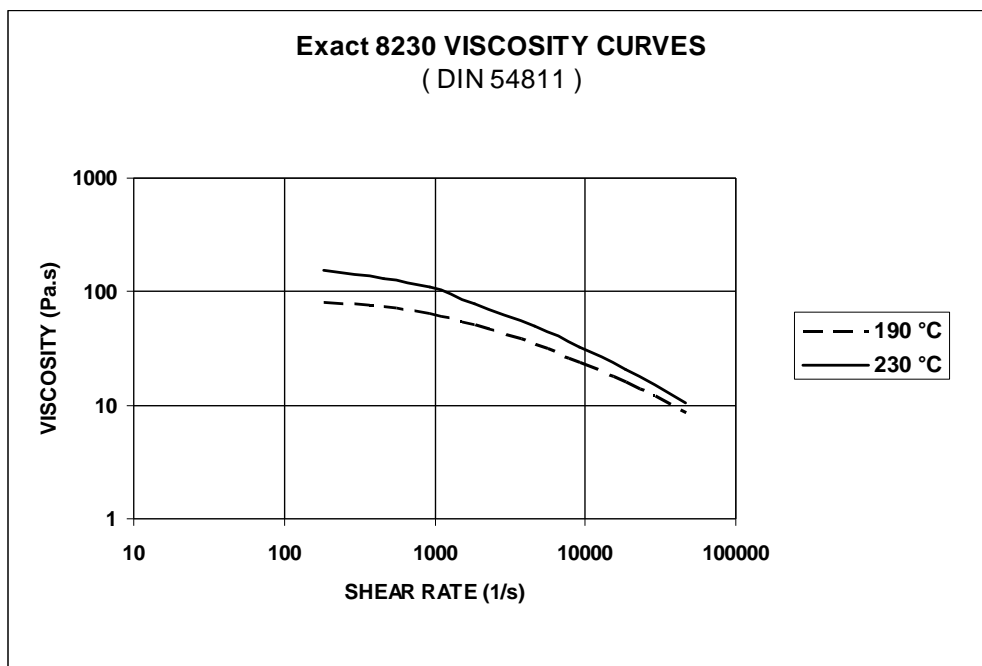

### **Additives**

EXACT™ 8230 contains processing stabilizers.

### **Food Law Compliance and Product Handling**

EXACT 8230 can - in principle - be used in food contact applications in various EU Member States and in the USA (FDA). Migration or use limitations may apply. Please contact your sales representative for more detailed information and/or actual compliance certification documents.

Specific information on material safety aspects of EXACT 8230 will be provided upon request.

### **Packaging**

EXACT 8230 is supplied as free flowing pellets with standard package type 25 kg bags on shrink wrapped pallets with a total weight of 1,375 kg.

### **Further information**

DEXPlastomers v.o.f.  
CBS-weg 2  
P.O. Box 6500  
6401 JH HEERLEN  
The Netherlands

Tel. +31 45 5788002

[www.dexplastomers.com](http://www.dexplastomers.com)

July 2011

All information, advice and/or samples ("Information") are provided by or on behalf of DEXPlastomers on an "as is" basis, without any further warranties as to the accuracy, usefulness, correctness or completeness thereof. Use or disclosure of or reliance on such Information shall be for your own sole risk, account and responsibility and you will indemnify and hold DEXPlastomers and its Sales Agents harmless from and against any and all damages or claims from third parties in respect of your receipt, use or disclosure of or reliance on the Information. The disclosure of Information shall not be construed as granting you a license or any other intellectual property rights relating to such Information. The obtaining of such license or rights shall be subject to separate negotiations. General Conditions of Sale of DEXPlastomers Sales Agents apply to all sales transactions. Exact is a trademark of ExxonMobil Corporation.