

Stamylex 1016 LF

Octene-1 linear low density polyethylene

DATA SHEET

Description and Attributes

Stamylex 1016 LF is an octene based linear low density polyethylene produced in a solution polymerisation process using a Ziegler – Natta catalyst.


Stamylex 1016 LF offers an excellent combination of sealability, mechanical strength and optical properties.

Applications

The main applications for Stamylex 1016 LF include high quality pallet stretch films, silage films, seal layers applied in coextruded and laminated food packaging film structures.

<i>Polymer properties</i>	<i>Units</i>	<i>Typical values</i>	<i>Method</i>
Melt Flow Rate (2.16 kg/190°C)	dg/min	1.1	ISO 1133
Density (23°C)	kg/m ³	919	ISO 1183 (A)
<i>Thermal properties</i>			
Vicat softening temperature	°C	102	ISO 306
DSC melting point	°C	123	DIN 53765
DSC average heat of fusion	J/g	115	DIN 53765

Stamylex 1016 LF

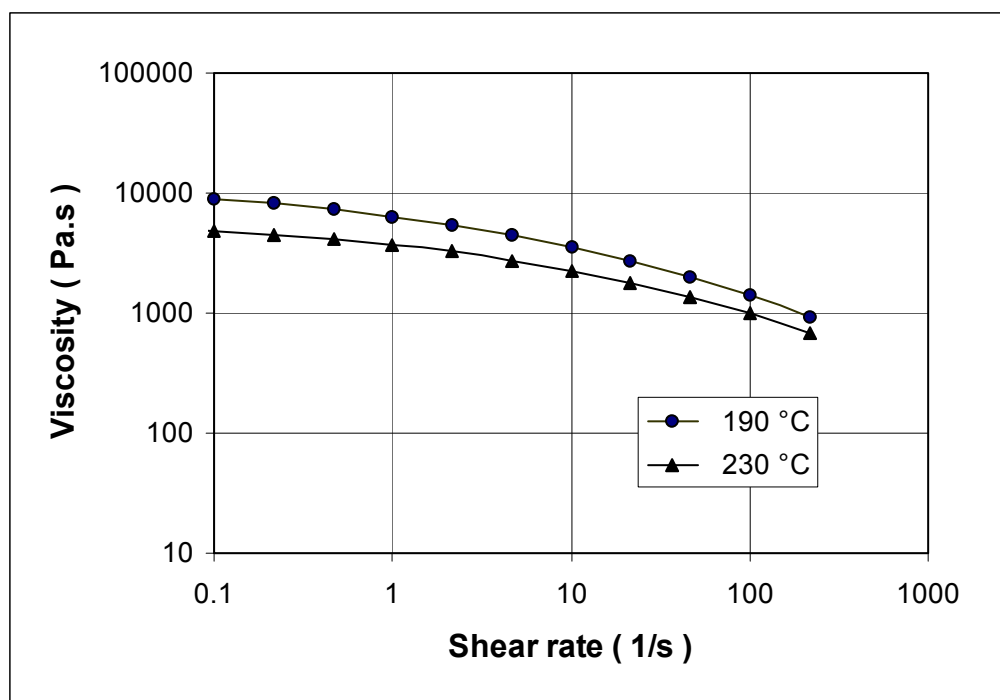

Food Law Compliance and Product Handling

Stamylex 1016 LF complies with FDA 21 CFR 177.1520 (olefin polymers).

More detailed and specific information on food law compliance and material safety aspects of Stamylex grades will be provided upon request.

Packaging

Stamylex 1016 LF is supplied as free flowing pellets with standard package type 25 kg bags on shrink wrapped pallets with a total weight of 1'375 kg.

Further information

DEX-PLASTOMERS V.O.F.
CBS-weg 2
P.O. Box 6500
6401 JH HEERLEN
The Netherlands

Tel. +31 45 5782401
Fax +31 45 5782405

June 2002