

# Stamylex 1046 F

## Octene-1 linear low density polyethylene

### DATA SHEET

#### Description and Attributes

Stamylex 1046 F is an octene based linear low density polyethylene produced in a solution polymerisation process using a Ziegler – Natta catalyst.

Stamylex 1046 F offers excellent mechanical properties, sealing characteristics and optical quality.


The main applications for Stamylex 1046 F include pallet stretch wrap and seal layers for film structures applied in general packaging applications.

#### Applications

The main applications for Stamylex 1046 F include pallet stretch wrap and seal layers for film structures applied in general packaging applications.

<i>Polymer properties</i>	<i>Units</i>	<i>Typical values</i>	<i>Method</i>
Melt Flow Rate (2.16 kg/190°C)	dg/min	4.4	ISO 1133
Density (23°C)	kg/m <sup>3</sup>	919	ISO 1183 (A)
<b>Thermal properties</b>			
Vicat softening temperature	°C	98	ISO 306
DSC melting point	°C	122	DIN 53765
DSC average heat of fusion	J/g	115	DIN 53765

## Stamylex 1046 F

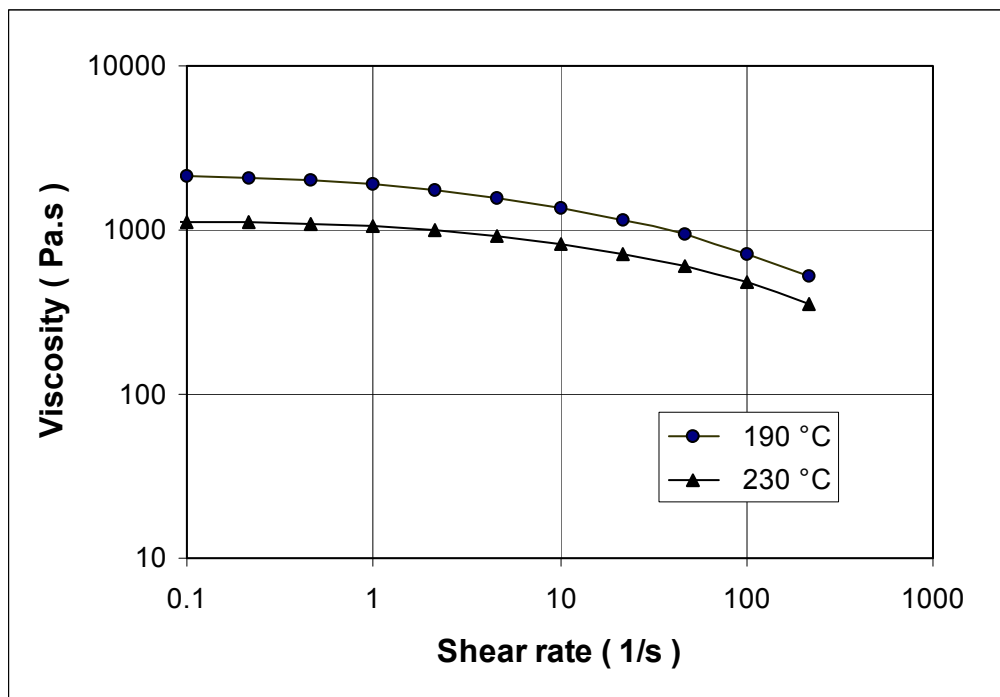

### **Food Law Compliance and Product Handling**

Stamylex 1046 F complies with FDA 21 CFR 177.1520 (olefin polymers). More detailed and specific information on food law compliance and material safety aspects of Stamylex grades will be provided upon request.

### **Packaging**

Stamylex 1046 F is supplied as free flowing pellets with standard package type 25 kg bags on shrink wrapped pallets with a total weight of 1'375 kg.

### **Further information**

DEX-PLASTOMERS V.O.F.  
CBS-weg 2  
P.O. Box 6500  
6401 JH HEERLEN  
The Netherlands

Tel. +31 45 5782401  
Fax +31 45 5782405

June 2002