

Stamylex 2258

Linear low density polyethylene

DATA SHEET

Description and Attributes

Stamylex 2258 is a linear low density polyethylene produced in a solution polymerisation process using a Ziegler – Natta catalyst.

Characterised by good processing properties and toughness, Stamylex 2258 is used primarily to manufacture articles with extremely long flow paths and stringent warp requirements.

Applications

A high resistance to environmental stress cracking and its dimensional stability render Stamylex 2258 particularly suited for (domestic) applications, which require good resistance to the aggressive cleaning environment and high temperatures typically encountered, for example, in dish washing machines.

Polymer properties	Units	Typical values	Method
Melt Flow Rate (2.16 kg/190°C)	dg/min	24	ISO 1133
Density (23°C) [1,2]	kg/m ³	926	ISO 1183 (A)
Mechanical properties [2,3]	Units	Typical values	Method
Tensile test [5]			ISO 527/2
Stress at break [7]	MPa	8.3	
Strain at break [7]	%	65	
Tensile modulus [6]	MPa	300	
Notched Izod [9]			ISO 180/A
at + 23 °C	kJ/m ³	47	
Shore hardness D [11]		49	ISO 868
Thermal properties			
Vicat softening temperature at 10 N (VST/A)	°C	94	ISO 306
DSC melting point [13]	°C	118	DIN 53765
Enthalpy change	J/g	125	DIN 53765

[1] Specimen dimensions : 42 x 42 x 1.6 mm

[2] Compression moulding conditions of test specimen (per ISO 293) : moulding temperature 160 °C, cooling rate 40 °C/min

[3] Conditioning of test specimen : temperature 23 °C, RH 50 %, 16 hrs

[5] Test specimen as per ISO 527/2 type 1 BA, thickness 2 mm

[6] Speed of testing : 1 mm/min


[7] Speed of testing : 500 mm/min

[9] Specimen dimensions : 80 x 10 x 4 mm, notch 45 °, r 0.01"

[11] After 15 seconds

[13] Top melt temperature at 10 °C/min

Stamylex 2258

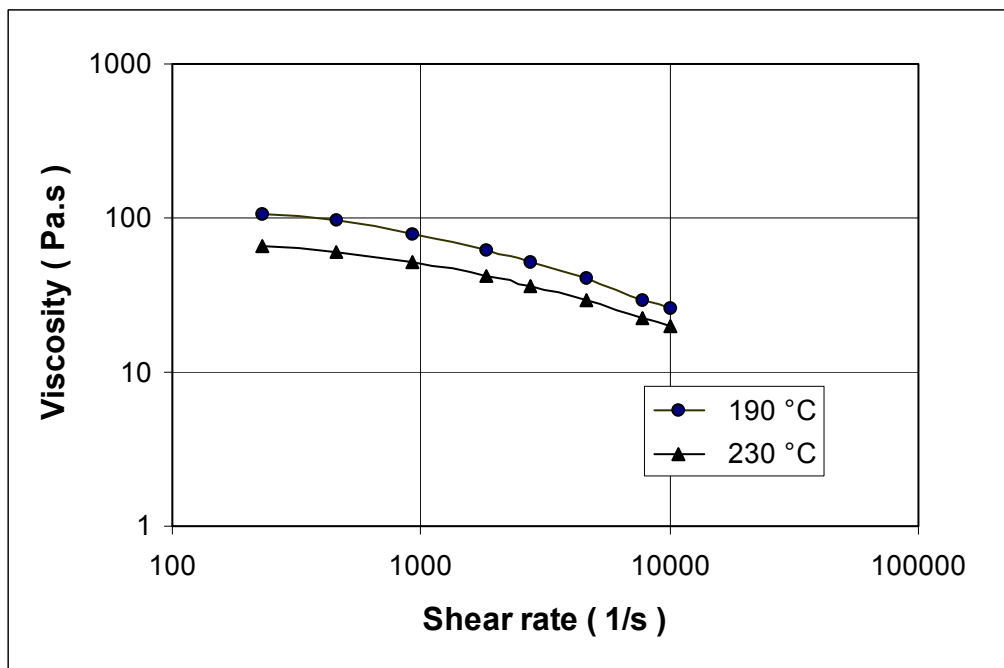

Food Law Compliance and Product Handling

Stamylex 2258 complies with FDA 21 CFR 177.1520 (olefin polymers).

More detailed and specific information on food law compliance and material safety aspects of Stamylex grades will be provided upon request.

Packaging

Stamylex 2258 is supplied as free flowing pellets with standard package type 25 kg bags on shrink wrapped pallets with a total weight of 1'375 kg.

Further information

DEX-PLASTOMERS V.O.F.
CBS-weg 2
P.O. Box 6500
6401 JH HEERLEN
The Netherlands

Tel. +31 45 5782401
Fax +31 45 5782405

June 2002